14

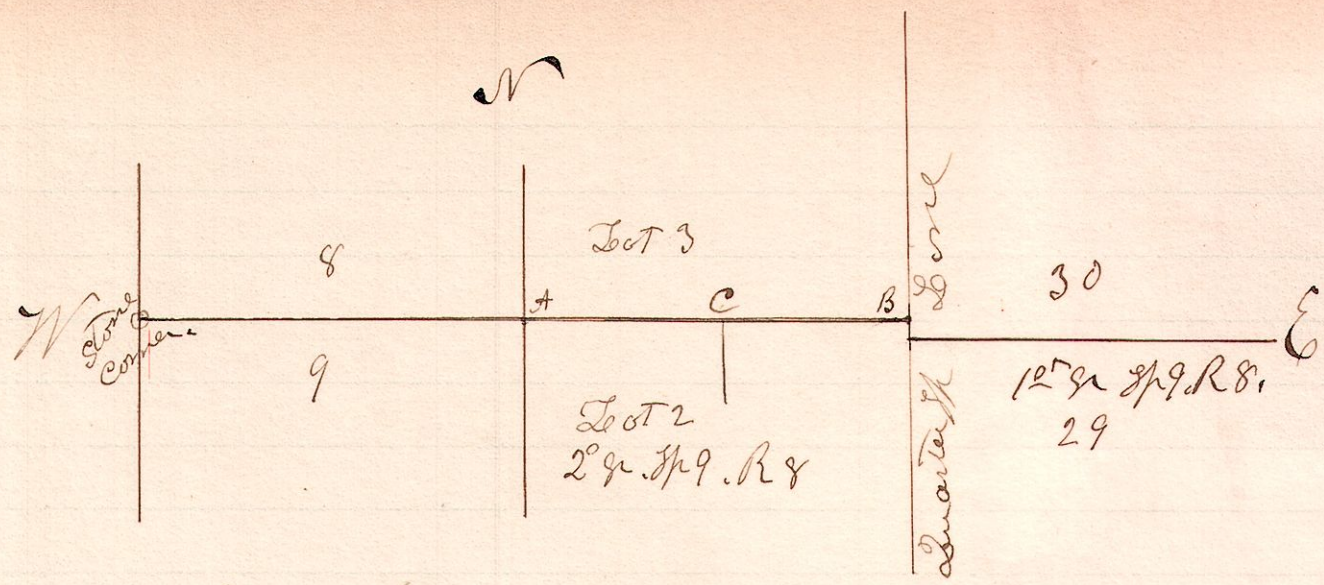

In order to establish the corner at A and B, I went to a Stone corner at west corner of lots 8 and 9, and ran East at a bearing of S 86½° E. and when I came to A. I dug up the ground and found the point of a partly decayed Stake on the direct line I was running, I then continued on East, (same bearing) and at C I struck a stone corner for division of lot 2. I continued on East, same bearing, until I struck quarter Sp line, where on the Survey I had made and the testimony of witness, I established a corner for lots 2 and 3, 2 qr. Sp E. R 8 (East) and took witness as follows: W Oak. 30. S 66½° E. 3 p 23 l. Planted a Nigger head Stone for corner.
At A. planted Stone and took witness as follows: Scrld Cherry 24 - S 80 W 4 p 20 l.

H. H Robinson
County Surveyor.